



## DATA INQUIRY SHEET

### 9204 POLAR MACH SERIES

Capacity (Nominal BTUH)	Cooling - Output BTU - 15,000 Heating - Output BTU (1) - 5,600
Electrical Rating	115 VAC, 60 HZ, 1 Phase
Cooling Full Load AMP's at A.R.I. Standard Condition	Compressor - 11.0 Fan Motor - Low - 3.65 Fan Motor - High - 3.8 Total - 14.65 on Low, 14.8 on High
Feature Equipment Amps	Heating (1) - 16.4
Running Watts: (Cooling) A.R.I. Standard Condition (80 F. DB/71 F. WB Indoor, 95 F. DB Outdoor)	1710
Running Watts: (Cooling) Desert Condition (100 F. DB/72 F. WB Indoor 120 F. DB Outdoor)	2100
Running Watts: (Heating) (1)	1845
Compressor Locked Rotor Amps	54.0
Thermostat Temperature Range	Cooling - 61 F. (±5) Heating (1) - 85 F. (±5)
Metering Device	Capillary Tube
Refrigerant Charge	20.00 oz.
Evaporator Air Delivery (CFM)	310 - High Speed
Generator Size	See "Generators" Below
Unit Weight (pounds) - Heat/Cool	96 lbs.
Use time delay fuse or circuit breaker (U.L. H.A.C.R. Type C.S.A.) Rated at 20 amps. Supply wires 12 AWG Min. (Copper)	

(1) When equipped with Elect-A-Heat feature.

**CEILING ASSEMBLY:** Any 8330 series, 7330B751, -755, 7530B750 or 9000 Series


**GENERATORS:**

It is not the policy of RV Products to size generators for application in Recreation Vehicles or related structures. However, when sizing generators, the total electrical power consumption in Watts must be determined and taken into consideration, such as:

- A. Maximum running watts of the air conditioner at RV Products Desert Test (See Specifications).
- B. Power consumption of electronic ovens, toasters, coffeemakers, television sets, refrigerators, lights, etc.
- C. Generators do lose capacity under the following conditions: (1) Altitude increases above sea level, (2) Temperature increases above certain outdoor design temperatures, and (3) Lack of maintenance.

**RV Products**  
A Division of Airxcel, Inc.  
P.O. Box 4020  
Wichita, KS 67204

### ROOF TOP UNIT DIMENSIONS

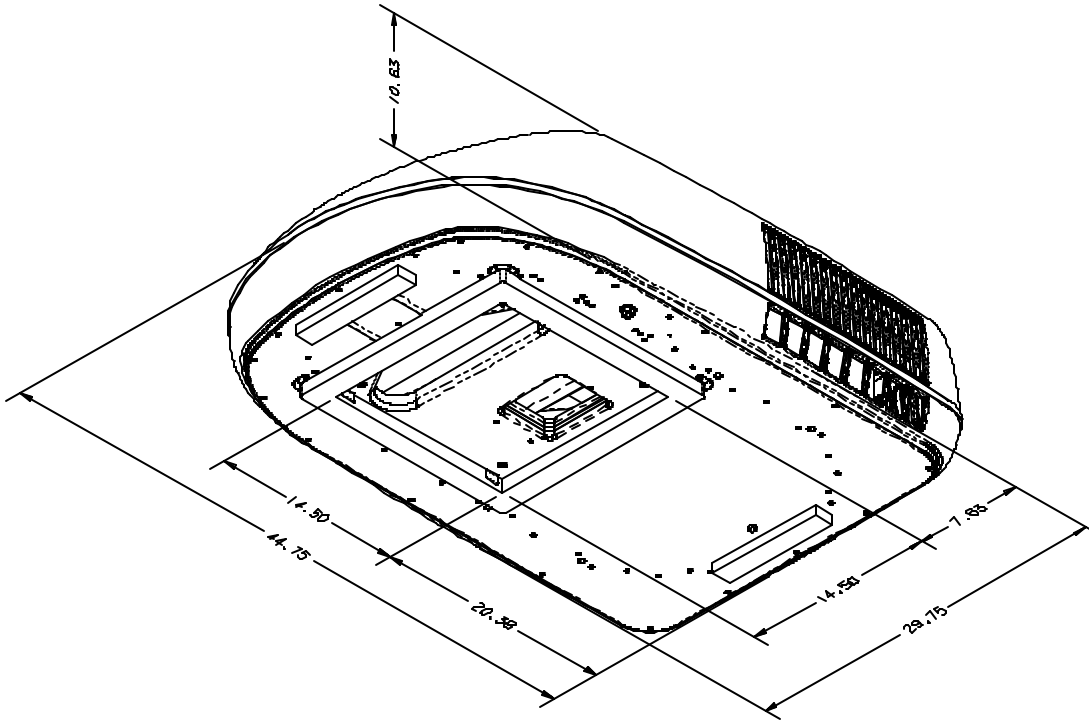

### QUICK REFERENCE CHART

DIMENSIONS		
Exterior Shroud	Height	10.63
	Width	29.75
	Length	44.75
Interior Shroud	Depth	2.33
	Width	19.9
	Length	20.1

### CEILING SHROUD DIMENSIONS

