

Coleman-Mach


MACH 15™

RV AIR CONDITIONER

Delivers the
highest
airflow rate available.

Want to take cooling power to the max? The Mach 15™ is the world's most powerful RV air conditioner with the highest cooling output you can buy, and has an airflow so strong, it's a sure bet for ducted systems.

The Mach 15™ is equipped with a 1/3 hp fan motor, the largest used in an RV air conditioner, delivering cool air at an incredible 325 CFM (cubic feet per minute). The Mach 15™ features the same streamlined shape that enhances the style and operational efficiency of every model in the line of Coleman®-Mach® RV Air Conditioners.

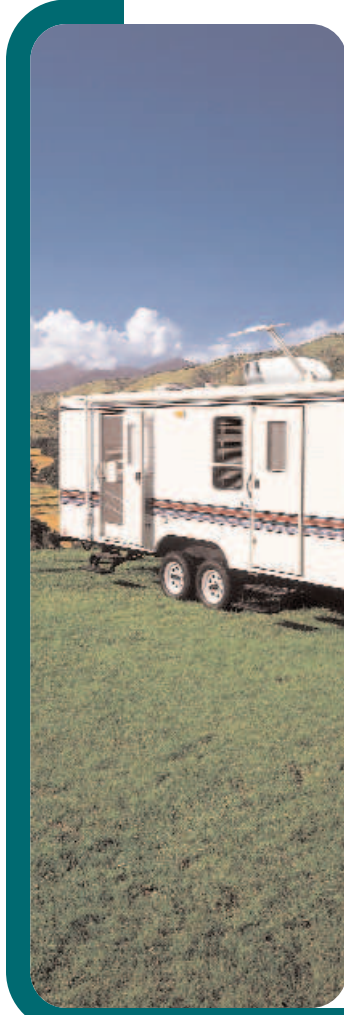

 **RVP**
RV PRODUCTS
A Division of AIRXCEL, Inc.
www.rvcomfort.com

Coleman-Mach

MACH 15™

RV AIR CONDITIONER

Cool down
with the world's most powerful
rooftop RV air conditioner.


Mach 15™ RV AC Specifications – 8335 Series

Nominal BTU Cooling Capacity	14,800
Locked Rotor Cooling Amps	71.0
Running W atts/Cooling ¹	1,748
Running W atts/Cooling ²	2,117
Running W atts/Heating ³	1,800
Electrical Rating	115V 60Cycles 1Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps/Cooling*	16.0
Approximate Full-Load Amps/Heating*	16.0
Evaporator Air Delivery CFM (high speed)	325
Unit Weight (lbs.)**	90

The fan motor is mounted directly to the bulkhead to fix the relative position of the motor, blower wheel and scroll. This prevents any distortion of the angle of the wheel and ensures a free turning action.

At 1¼ hp, the fan motor in the Mach 15™ is the largest in the industry. It features a sealed shaft to protect against damage from the elements.

Blower wheel has a large diameter and broad width, contributing to the highest CFM airflow among rooftop RV air conditioners.

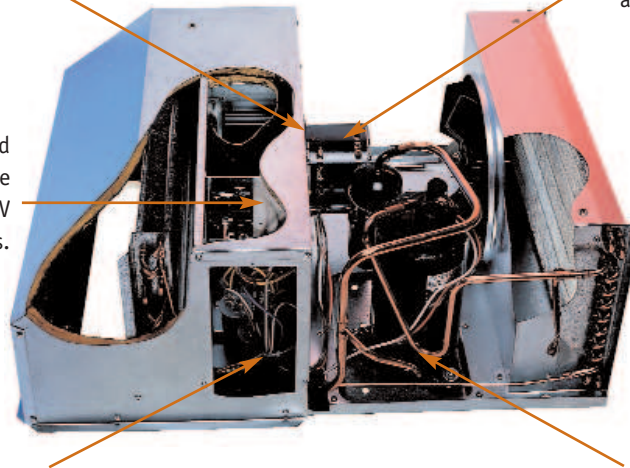

Start kit is standard equipment on the Mach 15™ with start capacitors and PTCR device that make starting easier under high temperatures and humidity conditions.

All-copper tubing has gas-flux brazed joints which are more corrosion-resistant than welds. The copper tubing is rifled inside to create turbulence in the coolant, enhancing the system's ability to dissipate heat.

*Optional Heater Assembly

**Installed weight will vary with Ceiling Package Option.

¹Tested under the following conditions: Cooling A.R.I. Standard Conditioning 80° F. (26° C.) DB/67° F. (19° C.) WB Indoor, 95° F. (35° C.) DB Outdoor at 115 VAC.

²Tested under the following conditions: Cooling A.R.I. Standard Conditioning 95° F. (35° C.) DB/71° F. (22° C.) WB Indoor, 115° F. (46° C.) DB Outdoor at 103 VAC.

³Tested under the following conditions: 47° F. (8° C.) Outdoor Temperature.

IMPORTANT: It is not the policy of RV Products to size generators for application in recreational vehicles. However, when sizing generators, the electrical power consumption in watts for the entire vehicle must be determined and taken into consideration. RV Products tests all units in accordance with A.R.I. Standard 210.

RVP
RV PRODUCTS
A Division of AIRXCEL, Inc.
www.rvcomfort.com